




3SCP1-90/HÍBRIDA

Caudal máximo 4 m³/h. Altura máx. 90 m. Impulsión 1½" Centrífuga 1,5 CV

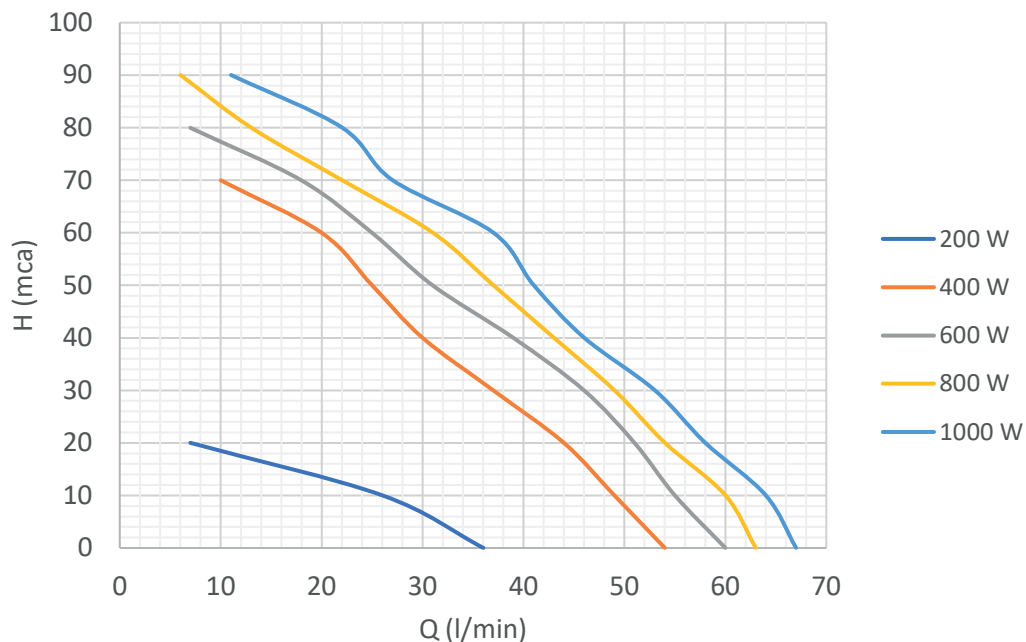

	Potencia de entrada (W)				
	200	400	600	800	1000
Altura (m)	Caudal (l/min)				
0	36	54	60	63	67
10	26	49	55	60	64
20	7	44	51	54	58
30		37	46	49	53
40		30	39	43	46
50		25	31	37	41
60		20	25	31	37
70		10	18	22	27
80			7	13	22
90				6	11

Panel				Paneles recomendados*	
Power (W)	Vmp (V)	Voc (V)			
330	37,5	46,8		4	
450	42,1	50,5		3	
Voltaje Entrada (Vmp): 60V-360V (Voc max=400V)				C. Alterna: 90V-240V	
Ø Impulsión	Peso neto	Ø Bomba	Máx. Potencia	Caudal máx.	Altura máx.
1½”	8,6 kg	3”	1,5 kW	4 m³/h	90 m

* No superar en combinación de string el valor Voc max.

TABLA SELECCIÓN DE CABLE BOMBAS SUMERGIDAS SOLARES

POTENCIA	Consumo	Sección de cable (mm ²)					
		2,5	4	6	10	16	25
	(A)	Longitud (m)					
0,3 CV	6	39	62	94	156	250	390
0,5 CV	8	44	70	104	174	279	435
0,75 CV	10	41	65	98	164	262	410
1 CV	12	38	61	92	154	246	384
2 CV	8,8	184	295	442	939	1179	1842
3 CV	8,8	263	421	632	1053	1684	2632
5 CV	14	-	200	299	499	799	1248